


# Standard Mantel Dimensions

Standard	A	B	C	D	E	F	G	H	I	J	K	L	Fits
Full													
<b>EMF-20</b>	41 3/4	8 1/2	36 1/2	38 1/4	7 3/8	26 1/2	22 5/8	6 3/4	28 3/4	13 1/8	3 1/2		Taos
<b>EMF-22</b>	38 3/8	13 1/4	38 1/2	35	12 3/8	23	26 3/4	11 3/4	24 1/2	17 3/8	3 1/4		VF24FP
<b>EMBF-1S</b>	56 3/4	22 1/4	51 3/8	49	19 1/8	34 1/2	33 3/4	18 1/2	38 1/2	22 1/2	3 1/4		VFD32FB/DVD32FP/VFP32FP
<b>EMBF-2S</b>	60 3/4	22 1/4	51 3/8	53	19 1/8	38 1/2	33 3/4	18 1/2	42 1/2	22 1/2	3 1/4		DVD36FP
<b>EMBF-3S</b>	62 3/4	25 3/4	53 3/8	55	22 5/8	40 1/2	35 3/4	22	44 1/2	22 1/2	3 1/4		VFD36FB/DVP36FP
<b>EMBF-4S</b>	66 3/4	25 3/4	53 3/8	59	22 5/8	44 1/2	35 3/4	22	48 1/2	22 1/2	3 1/4		VFD42FB/DVD42FP/DVP42FP
<b>EMBF-5S</b>	56 3/4	27 3/4	56 5/8	49	24 5/8	34 1/2	39	24	38 1/2	22 1/2	3 1/4		VFP32FB/VFS32FB
<b>EMBF-6S</b>	62 3/4	27 3/4	56 5/8	55	24 5/8	40 1/2	39	24	44 1/2	22 1/2	3 1/4		VFP36FB/VFS36FB
<b>EMBF-7S</b>	66 3/4	27 3/4	56 5/8	59	24 5/8	44 1/2	39	24	48 1/2	22 1/2	3 1/4		VFP42FB/VFS42FB
<b>EMBF-8S</b>	62 3/4	22 1/4	53 3/8	55	19 1/8	40 1/2	35 3/4	18 1/2	44 1/2	22 1/2	3 1/4		VFP36FP
<b>EMBF-9S</b>	55	21	47	47 1/2	17 7/8	33	26 1/2	17 1/4	37	18 3/8	3 1/4		Mantis
<b>EMBF-11S</b>	45 3/8	17 1/4	41	39 1/2	14 5/8	30	30 1/2	14	41	16 1/4	3 1/4		VFD26FP
Corner													
<b>EMC-20</b>	46 1/4	26 3/8	36 1/2	44 1/8	32 5/8	26 1/2	22 5/8	25	28 3/4	11 3/4	3 1/2	31 1/4	Taos
<b>EMC-22</b>	42 1/2	24 5/8	38 1/2	40 5/8	30 1/8	23	26 3/4	23 1/4	24 1/2	11 7/8	3 1/4	28 7/8	VF24FP
<b>EMBC-1S</b>	63	37 1/4	51 3/8	57 3/4	44 1/2	34 1/2	33 3/4	33 1/2	38 1/2	20 3/4	3 1/4	40	VFD32FB/DVD32FP/VFP32FP
<b>EMBC-2S</b>	67	39 1/4	51 3/8	61 3/4	47 3/8	38 1/2	33 3/4	35 1/2	42 1/2	20 3/4	3 1/4	42	DVD36FP
<b>EMBC-3S</b>	69	40 1/4	53 3/8	63 3/4	48 3/4	40 1/2	35 3/4	36 1/2	44 1/2	20 3/4	3 1/4	43	VFD36FB/DVP36FP
<b>EMBC-4S</b>	73	42 1/4	53 3/8	67 3/4	51 5/8	44 1/2	35 3/4	38 1/2	48 1/2	20 3/4	3 1/4	45	VFD42FB/DVD42FP/DVP42FP
<b>EMBC-5S</b>	66 3/8	40 3/4	56 5/8	61 1/4	47	34 1/2	39	37	38 1/2	20 3/4	3 1/4	43 5/8	VFP32FB/VFS32FB
<b>EMBC-6S</b>	72 3/8	43 3/4	56 5/8	67 1/4	51 1/4	40 1/2	39	40	44 1/2	20 3/4	3 1/4	46 5/8	VFP36FB/VFS36FB
<b>EMBC-7S</b>	76 3/8	45 3/4	56 5/8	71 1/4	54 1/8	44 1/2	39	42	48 1/2	20 3/4	3 1/4	48 5/8	VFP42FB/VFS42FB
<b>EMBC-8S</b>	69	40 1/4	53 3/8	63 3/4	48 3/4	40 1/2	35 3/4	36 1/2	44 1/2	20 3/4	3 1/4	43	VFP36FP
<b>EMBC-9S</b>	61 5/8	36 3/8	47	56 1/4	43 5/8	33	26 1/2	32 3/4	37	18 3/8	3 1/4	41 1/2	Mantis
<b>EMBC-11S</b>	53 5/8	32 5/8	41	49 7/8	38	31	30 1/2	30 1/4	41	16 5/8	3 1/4	33 7/8	VFD26FP

**EMBF & EMF**

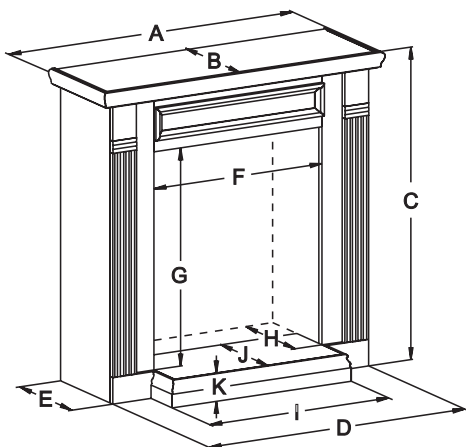

**EMBC & EMC**

