




**Empire Comfort Systems Inc.**  
 918 Freeburg Avenue  
 Belleville, Illinois 62220-2623

Web Site [www.empirecomfort.com](http://www.empirecomfort.com)

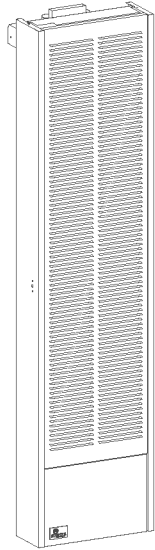

## Gravity Vented Wall Furnace

**Models**  
**GWT-25**  
**GWT-35**



### Specifications

Model	GWT-25	GWT-35
Input BTU/HR(KW/H)	25,000 (7.3)	35,000 (10.3)
Height	66 1/8" (168cm)	66 1/8" (168cm)
Width	16" (406mm)	16" (406mm)
Depth	6" (152mm)	6" (152mm)
Gas Inlet Pipe	1/2"	1/2"
Vent Pipe Type B Oval	4" (102mm)	4" (102mm)
<b>Accessories For Above Furnaces</b>		
GWTB-2	Blower Package	
GWBB-T	Remote Bulb Thermostat, Millivolt	
GWSG-T	Wall Thermostat, Millivolt	
TMV	Wall Thermostat, Millivolt - Reed Switch	
GWTR-1	Rear Register Kit	
GWTW-2	Out-of-the-Wall Kit	

**Attention:** When the GWTW-1, Out-of-the-Wall kit is used the GWTR-1, Rear Register kit **cannot** be used.

### CLEARANCES

1. In selecting a location for installation, it is necessary to provide adequate accessibility clearances for servicing and proper installation.
2. Clearances to combustible surfaces are 4" (102mm) from sides, 12" (305mm) to top, 1 1/2" (38mm) from floor.

**NOTE:** Minimum distance of 1 1/2" (38mm) must also be maintained from top surface of carpeting, tile, etc.

**Note:** No vent equipment supplied with furnace.

#### 4" Oval (all parts purchase locally)

1. Type B-1 oval pipe
2. Single story type B-1 gas vents require a baseplate and one pair of ceiling plate spacers.
3. Multi-story type B-1 gas vents require a baseplate, one pair of ceiling plate spacers at the first floor ceiling and one pair of fire stop spacers at each successive ceiling level.

Type B-W gas vent pipe is available for single story or multi-story installations. Type B-W gas vent pipe is to be used with the Listed base plate, ceiling plate spacers and fire stop spacers.

