




**Empire Comfort Systems Inc.**  
 918 Freeburg Avenue  
 Belleville, Illinois 62220-2623

Web Site [www.empirecomfort.com](http://www.empirecomfort.com)

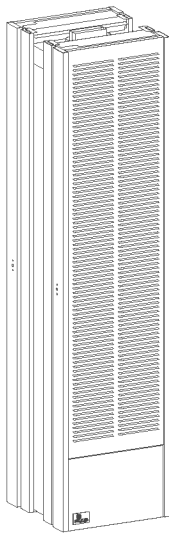

## Gravity Vented Wall Furnace

**Models  
GWT-50**



### Specifications

Model	GWT-50
Input BTU/HR (KW/H)	50,000 (14.7)
Height	66 1/8" (168cm)
Width	16" (406mm)
Depth (Out of wall)	6" (152mm)
Gas Inlet Pipe	1/2"
Vent Pipe Type B Oval	4" (102mm)
<b>Accessory</b>	
GWTB-2	Blower Package
GWRB-T	Remote Bulb Thermostat, Millivolt
GWSG-T	Wall Thermostat, Millivolt
TMV	Wall Thermostat, Millivolt - Reed Switch

GWT-50 (SG, RB) is a DUAL WALL Furnace. Warmed air is discharged into two rooms which share a common wall.

### CLEARANCES

1. In selecting a location for installation, it is necessary to provide adequate accessibility clearances for servicing and proper installation.
2. Clearances to combustible surfaces are 4" (102mm) from sides, 12" (305mm) to top, 1 1/2" (38mm) from floor.

**NOTE:** Minimum distance of 1 1/2" (38mm) must also be maintained from top surface of carpeting, tile, etc.

**Note:** No vent equipment supplied with furnace.

#### 4" Oval (all parts purchase locally)

1. Type B-1 oval pipe
2. Single story type B-1 gas vents require a baseplate and one pair of ceiling plate spacers.
3. Multi-story type B-1 gas vents require a baseplate, one pair of ceiling plate spacers at the first floor ceiling and one pair of fire stop spacers at each successive ceiling level.

Type B-W gas vent pipe is available for single story or multi-story installations. Type B-W gas vent pipe is to be used with the Listed base plate, ceiling plate spacers and fire stop spacers.

